



MultiWinch Versatile 24 VDC gearmotor

The MultiWinch gearmotor is a powerful 24 VDC winch motor for opening and closing air inlets in poultry, pig and cattle houses.

Powerful and precise

The advanced electronics and compact design of the MultiWinch makes it the most versatile gearmotor in this segment. With a pulling force of 340 kg, a torque of 90 Nm and a standard speed of 0.8 rpm, the climate in the barn can be controlled very precisely. The MultiWinch features three soft-touch buttons for easy set up and precise position determination

Carefree installation and maintenance

The gearmotor housing is made of corrosionresistant aluminium and has protection class IP65. As a result, MultiWinch is maintenance-free and made for years of carefree use in barns for intensive livestock farming. The smart design makes it easy to install and commission the gearmotor.

Discover the advantages

- Versatile gearmotor
- Powerful and precise
- Easy installation
- Maintenance-free







Comprehensive accessory package


The MultiWinch comes standard with a single capped axle tap. An extensive selection of available accessories allow it to be made suitable for any application, such as with a belt or winch drum or a chain coupling set.





Power supply unit & emergency power supply

To control the MultiWinch, a 24 V power supply unit is available for 1 or 2 motors. It is also possible to connect a 24 V emergency power supply, which ensures that in the event of a power failure the motors are run to the emergency position.

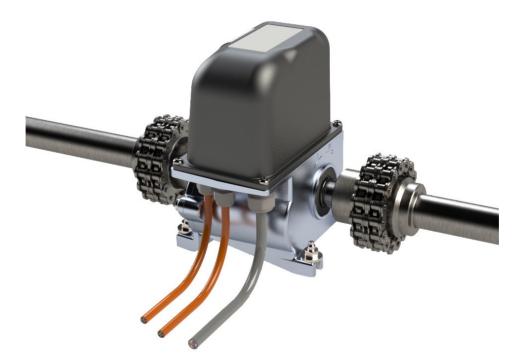

hotraco Agri

Stationsstraat 142 5963 AC Hegelsom The Netherlands

T +31(0)77 327 5020 info@hotraco-agri.com

www.hotraco-agri.com

